

ವಿಶ್ವವಿದ್ಯಾನಿಲಯ ವಿಜ್ಞಾನ ಕಾಲೇಜು, ತುಮಕೂರು

(ತುಮಕೂರು ವಿಶ್ವವಿದ್ಯಾನಿಲಯದ ಘಟಕ ಕಾಲೇಜು)

ಬಿ.ಹೆಚ್. ರಸ್ತೆ, ತುಮಕೂರು. 572103 ದೂ.ಸಂ: 0816-2260220

ಸಂಖ್ಯೆ:ವಿವಿಕಾತು:2024-25:

ದಿನಾಂಕ:18.01.2025

:ದರಪಟ್ಟಿ ಆಹ್ವಾನ(ಕಾಲೇಜು ವೆಬ್ ಸೈಟ್ ಮುಖಾಂತರ):


ವಿಷಯ: ವಿಶ್ವವಿದ್ಯಾನಿಲಯ ವಿಜ್ಞಾನ ಕಾಲೇಜಿನ ಕಛೇರಿ ಹಾಗೂ ಮೊದಲನೇ ಮಹಡಿ ಕೊಠಡಿ ಸಂಖ್ಯೆ ಎಫ್-102 ರಲ್ಲಿ ಶೌಚಾಲಯಗಳ ದುರಸ್ತಿ ಕಾಮಗಾರಿ ಸಂಬಂಧ ದರಪಟ್ಟಿ ಆಹ್ವಾನಿಸುವ ಕುರಿತು.

ವಿಶ್ವವಿದ್ಯಾನಿಲಯ ವಿಜ್ಞಾನ ಕಾಲೇಜಿನ ಕಛೇರಿ ಹಾಗೂ ಮೊದಲನೇ ಮಹಡಿಯಲ್ಲಿರುವ ಕೊಠಡಿ ಸಂಖ್ಯೆ ಎಫ್-102ರಲ್ಲಿ ಇರುವ ಶೌಚಾಲಯಗಳ ದುರಸ್ತಿ / ನವೀಕರಣ ಕಾಮಗಾರಿ ನಿರ್ವಹಿಸುವ ಸಂಬಂಧ ಕೊಟೇಷನ್ ಆಧಾರದಲ್ಲಿ ಕೆಲಸವನ್ನು ನಿರ್ವಹಿಸಲು ಕಾಲೇಜಿನ ವೆಬ್ ಸೈಟ್ ಮುಖಾಂತರ ಈ ಕೆಳಕಂಡ ಷರತ್ತು ಮತ್ತು ನಿಬಂಧನೆಗಳಿಗೆ ಒಳಪಟ್ಟು ಅರ್ಹ ಗುತ್ತಿಗೆದಾರರಿಂದ ದರಪಟ್ಟಿಯನ್ನು ಆಹ್ವಾನಿಸಲಾಗಿದೆ.

Sl. No	DESCRIPTION	Unit	Qty	Rate	Amount
ಅನುಬಂಧದಲ್ಲಿ ಲಗತ್ತಿಸಿದೆ.					

ಷರತ್ತು ಮತ್ತು ನಿಬಂಧನೆಗಳು:

- ಮುಚ್ಚಿದ ಲಕೋಟೆಯ ಮೇಲೆ "ವಿಶ್ವವಿದ್ಯಾನಿಲಯ ವಿಜ್ಞಾನ ಕಾಲೇಜಿನ ಕಛೇರಿ ಹಾಗೂ ಮೊದಲನೇ ಮಹಡಿಯಲ್ಲಿರುವ ಕೊಠಡಿ ಸಂಖ್ಯೆ ಎಫ್-102ರಲ್ಲಿ ಇರುವ ಶೌಚಾಲಯಗಳ ದುರಸ್ತಿ / ನವೀಕರಣ ಕಾಮಗಾರಿ ದರಪಟ್ಟಿ" ಎಂದು ಸ್ಪಷ್ಟವಾಗಿ ನಮೂದಿಸುವುದು.
- ದರಪಟ್ಟಿಯನ್ನು, "ಪ್ರಾಂಶುಪಾಲರು, ವಿಶ್ವವಿದ್ಯಾನಿಲಯ ವಿಜ್ಞಾನ ಕಾಲೇಜು, ತುಮಕೂರು" ಇವರ ಹೆಸರಿಗೆ ಕಡ್ಡಾಯವಾಗಿ ಅಂಚೆಯ ಮೂಲಕ ಅಥವಾ ಖುದ್ದಾಗಿ ತಲುಪಿಸತಕ್ಕದ್ದು, ಅಂಚೆಯ ವಿಳಂಬಕ್ಕೆ ವಿಶ್ವವಿದ್ಯಾನಿಲಯ ವಿಜ್ಞಾನ ಕಾಲೇಜು ಜವಾಬ್ದಾರಾಗುವುದಿಲ್ಲ.
- ಕ್ರಮಬದ್ಧವಾಗಿರದ ದರಪಟ್ಟಿಗಳನ್ನು ಅಂಗೀಕರಿಸುವ ಅಥವಾ ತಿರಸ್ಕರಿಸುವ ಹಕ್ಕನ್ನು ಕಾಲೇಜು ಕಾಯ್ದಿರಿಸಿಕೊಂಡಿರುತ್ತದೆ.
- ದರಪಟ್ಟಿಯನ್ನು ಸಲ್ಲಿಸಲು ಕೊನೆಯ ದಿನಾಂಕ: 27.01.2025 ಅಪರಾಹ್ನ 4.30 ಗಂಟೆಯವರೆಗೆ ಸಲ್ಲಿಸಬಹುದಾಗಿದ್ದು, ದರಪಟ್ಟಿಗಳನ್ನು ಮುದ್ದಾಂ ಅಥವಾ ಅಂಚೆಯ ಮೂಲಕ ಸಲ್ಲಿಸಬಹುದು.
- ದರಪಟ್ಟಿಯನ್ನು ದಿನಾಂಕ:28.01.2025 ರಂದು ಪೂರ್ವಾಹ್ನ 10.30 ಗಂಟೆಗೆ ತೆರೆಯಲಾಗುವುದು.
- ದರಪಟ್ಟಿ ಸಲ್ಲಿಸುವ ಸಂಸ್ಥೆಯವರು ತಮ್ಮ ಸಂಸ್ಥೆಯ GSTIN NO ಮತ್ತು PAN NO ದಾಖಲೆಗಳನ್ನು ದರಪಟ್ಟಿಯ ಜೊತೆಗೆ ಲಗತ್ತಿಸಬೇಕು.
- ದರಪಟ್ಟಿಗಳನ್ನು ಯಾವುದೇ ಕಾರಣ ನೀಡದೆ ಅಂಗೀಕರಿಸುವ ಅಥವಾ ತಿರಸ್ಕರಿಸುವ ಸಂಪೂರ್ಣ ಹಕ್ಕನ್ನು ವಿಶ್ವವಿದ್ಯಾನಿಲಯ ವಿಜ್ಞಾನ ಕಾಲೇಜು ಒಳಗೊಂಡಿರುತ್ತದೆ.
- ದರಪಟ್ಟಿಗಳ ಆಯ್ಕೆಯ ವಿಷಯದಲ್ಲಿ ವಿಶ್ವವಿದ್ಯಾನಿಲಯ ವಿಜ್ಞಾನ ಕಾಲೇಜಿನ ತೀರ್ಮಾನವೇ ಅಂತಿಮವಾಗಿರುತ್ತದೆ.
- ಪ್ರತಿ ಸಂಸ್ಥೆಯವರು ಒಂದು ದರಪಟ್ಟಿಯನ್ನು ಮಾತ್ರ ಸಲ್ಲಿಸತಕ್ಕದ್ದು.
- ಸರಬರಾಜು ಆದೇಶದಲ್ಲಿ ನೀಡುವ ಎಲ್ಲಾ ಷರತ್ತುಗಳನ್ನು ಪಾಲಿಸಬೇಕು.
- ಹೆಚ್ಚಿನ ವಿವರಗಳು ಅಥವಾ ಮಾಹಿತಿಯ ಅಗತ್ಯವಿದ್ದಲ್ಲಿ ಪ್ರಾಂಶುಪಾಲರು, ವಿಶ್ವವಿದ್ಯಾನಿಲಯ ವಿಜ್ಞಾನ ಕಾಲೇಜು, ತುಮಕೂರು ಇವರನ್ನು ಸಂಪರ್ಕಿಸುವುದು.

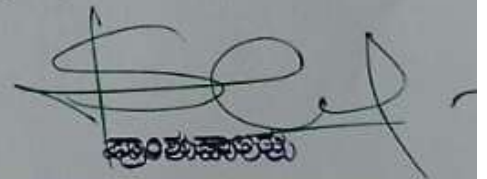

ಪ್ರಾಂಶುಪಾಲರು


ವಿಶ್ವವಿದ್ಯಾನಿಲಯ ವಿಜ್ಞಾನ ಕಾಲೇಜು
ತುಮಕೂರು-572103


SCHEDULE - "B"

Name of work: Renovation of work Office room and Staff room Toilet in Science College, Tumkur University

Sl No	Item Code	Description of work	Unit	No	No.	Length	Breadth	Depth	Qty.	Rate	Amount
										In Rs.	In Rs.
						m	m	m			
1	19.22.2SR 2023-24 (V-2) P No 189	Dismantling tile work in floors and roofs laid in cement mortar including stacking material to the appropriate disposal area as per direction of Engineer-in-charge. For thickness of tiles above 25 mm and up to 40 mm									
		Toilets		1	2	1.70	1.50			5.10	
		First Floor		1	1	2.70	1.80			4.86	
		Walls		1	2	6.40	1.50			19.20	
			Sqm							29.16	
			Basic rate								
			Area Specific Loading Charges 5%								
			Total Rate								
2	19.51SR 2023-24 (V-2) P No 192	Dismantling of flushing cistern of all types (C.I./PVC/Vitreous China) including stacking of useful materials near the site and disposal of unserviceable materials to the appropriate disposal area as per direction of Engineer-in-charge.									
		Cisterns		1	2					2	
		Wash Basin		1	2					2	
			Unit							4.00	
			Basic rate								
			Area Specific Loading Charges 5%								
			Total Rate								
3	8.1.1SR 2023-24 (V-2) P No 41	Providing 12 mm cement plaster with cement mortar 1:4 (1 cement: 4 fine sand) to brick masonry including rounding off corners wherever required smooth rendering, providing and removing scaffolding, including cost of materials, labour, curing complete as per specifications and as per directions of Engineer-in-charge.									
		Walls									
				1	1	1.50	2.10			3.15	
		First Floor		1	1	8.00	2.10			16.80	
			sqm							19.95	
			Basic rate								
			Area Specific Loading Charges 5%								
			Total Rate								
4	8.33.1SR 2023-24 (V-2) P No 46	Finishing with Deluxe Multi surface paint system for interiors and exteriors using Primer as per manufacturers specifications: Two coats applied on walls @ 1.25 L/10 m ² over and including one coat of Special primer applied @ 0.75 L/10 m ² with paint of approved quality to give an even shade, after thoroughly brooming the surface to remove all dirt, dust, mortar drops and foreign matter including preparing the surface even and sand paper smooth, cost of materials, labour complete as per specifications and as per directions of Engineer-in-charge. (The gloss should be 50% @ 60 degree angle with 10 years life)									
		Walls									
				1	1	1.50	2.10			3.15	
				1	1	1.70	2.10			3.57	
		First Floor		1	1	8.00	2.10			16.80	
			sqm							23.52	
			Basic rate								
			Area Specific Loading Charges 5%								
			Total Rate								
5	2.1.6SR 2023-24 (V-1) P No 15	Providing and laying in position Cement Concrete for levelling course for all works in foundation. The granite/trap/basalt crushed graded coarse aggregates and fine aggregates as per relevant IS Codes machine mixed, laid in layers not exceeding 150 mm thickness, well compacted using plate vibrators, including all load & lifts, cost of all materials of quality, labour, Usage charges of machinery, curing, and all the other appurtenances required to complete the work as per technical specifications. Mix 1:2:4 Using 20 mm nominal size graded crushed coarse aggregates									
		Toilets		1	1	1.70	1.50	0.08		0.20	
				1	1	2.70	1.80	0.08		0.39	

11	14.28.2.1SR 2023-24 (V-2) P No 136	Providing and fixing P.V.C. waste pipe for sink or wash basin including P.V.C. waste fittings complete. Flexible pipe 32 mm dia		1	2			2.00	
		Each						2.00	
		Basic rate							
		Area Specific Loading Charges 5%							
		Total Rate							
12	13.22.1.2SR 2023-24 (V-2) P No 120	Providing and fixing PTMT grating of approved quality and colour. Circular 125 mm nominal dia		1	2			2.00	
		Nos						2.00	
		Basic rate							
		Area Specific Loading Charges 5%							
		Total Rate							
13	14.7.1SR 2023-24 (V-5) P No 132	Providing PVC ringite pipes conforming to IS 4985:2000 with latest amendments and conveying to worksite, rolling and lowering into trenches, laying true to line and level and perfect linking at joints, testing and commissioning, including loading unloading at both destinations and outs of pipes wherever necessary including jointing of PVC pipes and specials (excluding cost of specials) with jointing of approved type, with all labour with all lead & lift including encasing the pipe around to a depth of not less than 15 cms. with soft gravel or selected earth available from the excavation etc. complete and giving necessary hydraulic test to the required pressure as per ISS (Contractor will make his own arrangements for procuring water for testing) etc. PVC pipes 50mm dia., 6 kg/sqcm & class 5		1	1	10.00		10.00	
		sanitary pipe line						10.00	
		Mtr						10.00	
		Basic rate							
		Area Specific Loading Charges 5%							
		Total Rate							
14	13.31.2SR 2023-24 (V-2) P No 122	Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply, including all CPVC plain & brass threaded fittings, including fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and testing of joints complete as per direction of Engineer in Charge. Internal work - Exposed on wall 20 mm nominal dia Pipes		1	1	15.00		15.00	
		water pipe line						15.00	
		Mtr						15.00	
		Basic rate							
		Area Specific Loading Charges 5%							
		Total Rate							
15	14.1.1SR 2023-24 (V-2) P No 131	Providing and fixing water closet squatting pan (Indian type W.C. pan) with 100 mm sand cast Iron P or S trap, 10 litre low level white P.V.C. flushing cistern, including flush pipe, with manually controlled device (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required: White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests		1	2			2.00	
		Closets						2.00	
		Each						2.00	
		Basic rate							
		Area Specific Loading Charges 5%							
		Total Rate							
		SUB TOTAL							
		ADD GST 18%							
		MISCELLANEOUS AND OTHER CHARGES							
		TOTAL AMOUNT							
		Rupees Ninety eight Thousand five hundred only							

1000

 ASSISTANT ENGINEER
 TUMKUR UNIVERSITY
 TUMKUR


 EXECUTIVE ENGINEER
 TUMKUR UNIVERSITY
 TUMKUR